


Mattson/ Division 6

SQ816 Sequencer panel overview

The obvious stuff

52 HP Euro format shown

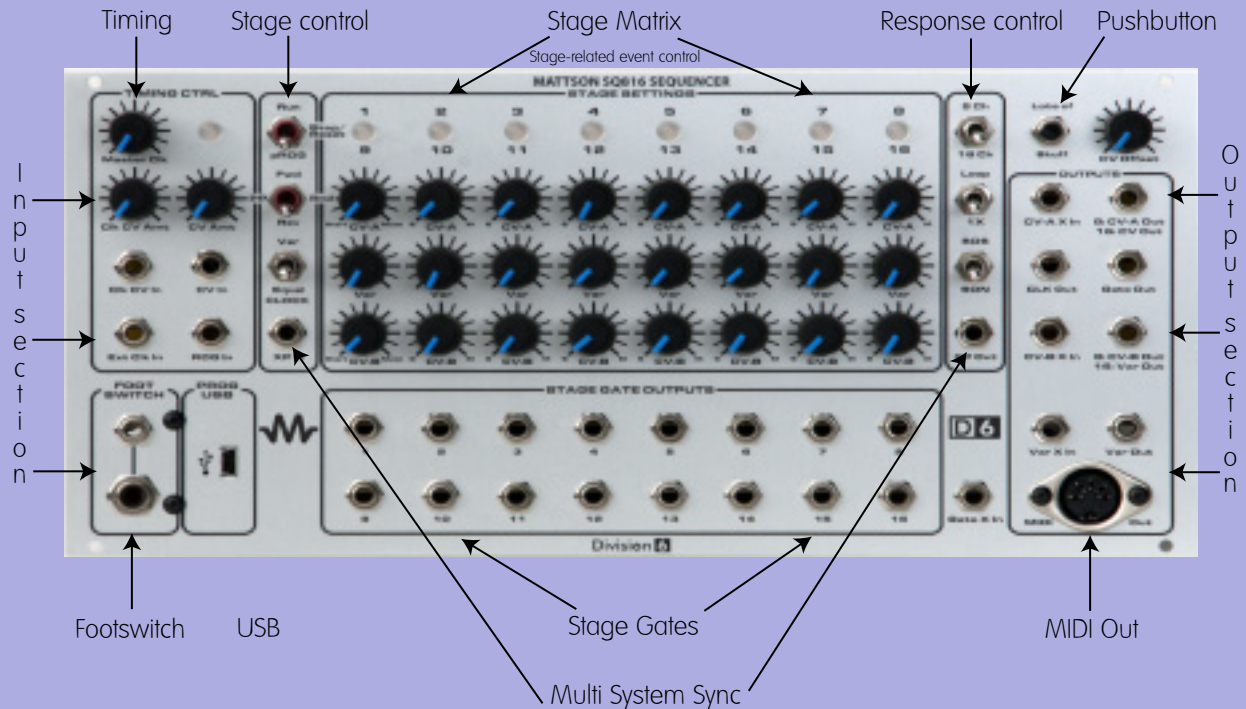

User Programmable Functions

The not so obvious stuff

User program functions are accessed via the Stage control and selected by the Response control

Typically: the Run/PP/pROG switch sets the program function block selection.
 the Fwd/PP/Rev switch selects the bank (A, Both or B) to be programmed. (Bank pointer)
 Whichever stage is active or, 'No stage' sets stage or global selection.
 Toggling the 8/16, Loop/1X or SOS/SON switches w/in 1 second determines and invokes the program selected.

User programmable functions available:

Gate Length: Short, Follow, Long

Octave: Global (A, Both or B) +1/0, Stage +1/0

Quantize: Global A, Both or B (enables MIDI)

MIDI Channel: A, Both, B, Pairs or sequence

ROG: Run (advance) On Gate